

Flexco Vinyl


FINISH SHEET



White Gray _040




Gray/Dark Gray _042

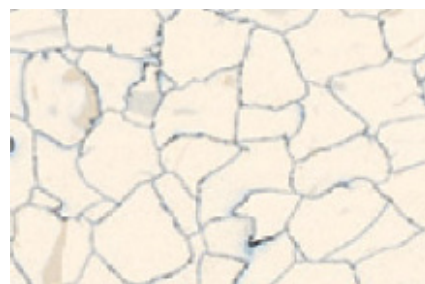


Ivory Buckskin _043




Light Beige/Tan _047

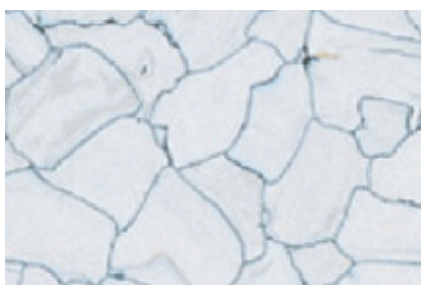


Steel Gray _048

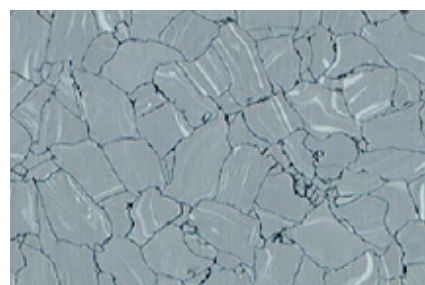

Warm Gray _065

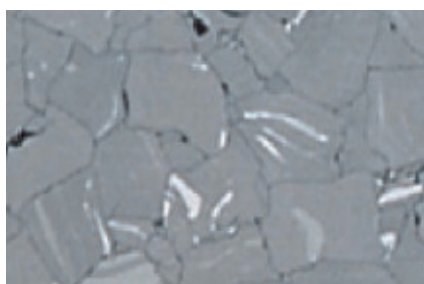

Charcoal/Light Gray _066

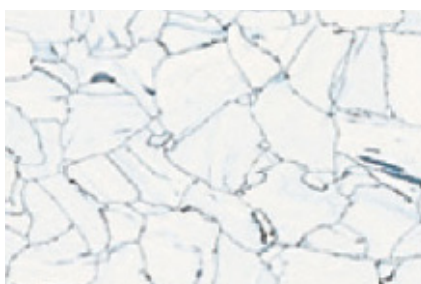

White/Blue _069



Galaxy _308




Star Struck _309




Dark Mocha _310




Golden Gate _311

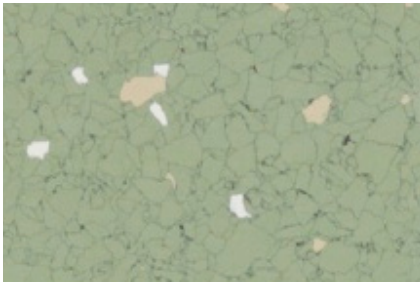

Honeydew _312

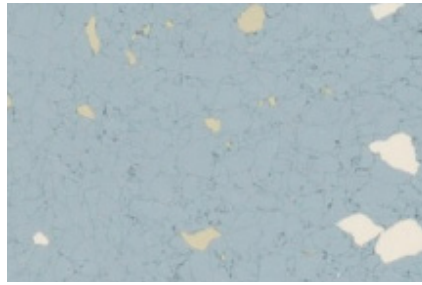


Rhythm & Blues _313

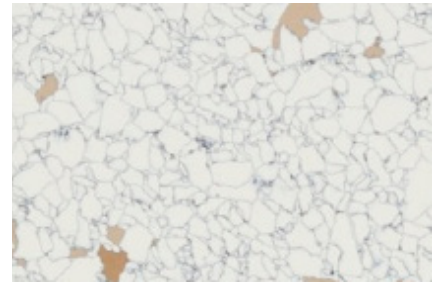

Toasted Coconut _314




Gingerbread _315

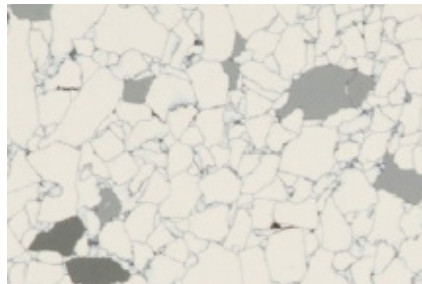

Cosmic Latte _316



Ginger Ale _317

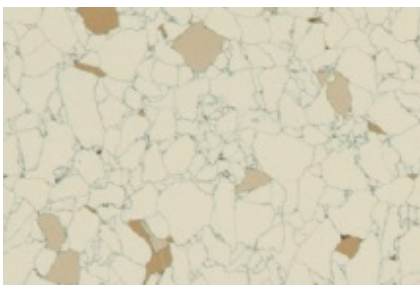

Amaretto _318



Tusk _319

Note: Color options each have a 4-digit part number beginning with a letter: Y signifies Static Dissipative
X signifies Conductive

The following are typical test values	Static Dissipative	Conductive
Surface to Ground Resistance NFPA 99 or ASTM 150		
1/8" (3mm) Thick Flooring Vinyl	$1.0 \times 10^6 - 1.0 \times 10^9$ ohms	$2.5 \times 10^4 - 1.0 \times 10^6$ ohms

Note: A combination of conductive tile and proper conductive footwear keeps body voltage less than 8 volts.

- Please contact Global IFS for physical color samples. This printed palette is representational only — do not use as a control sample.
- All vinyl colors are available in static dissipative or conductive finishes.