
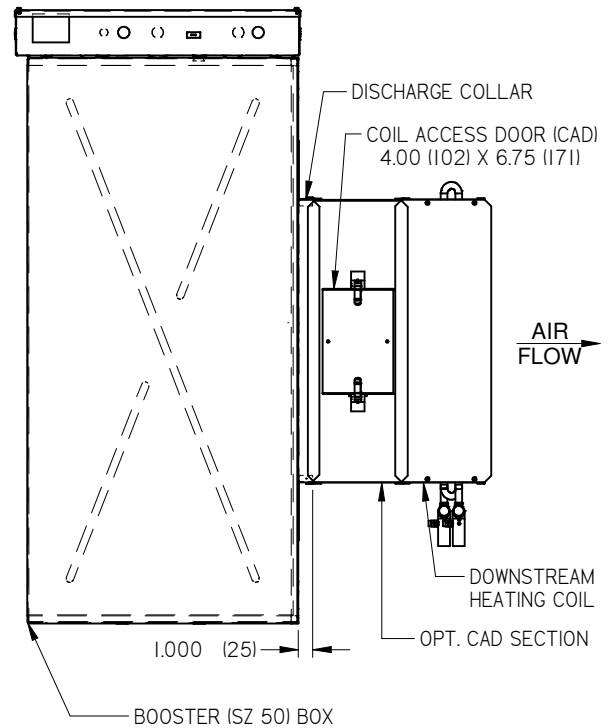
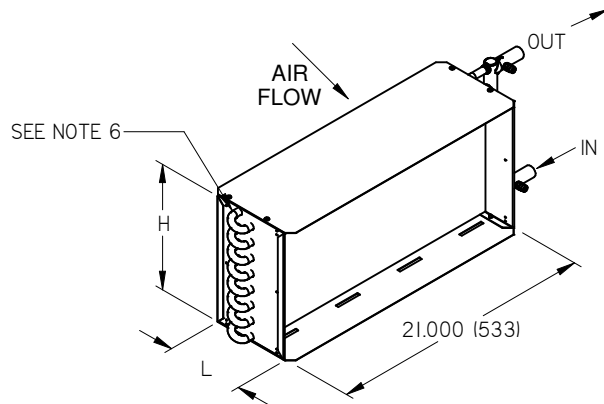


FPB OPTIONS - HOT WATER COILS

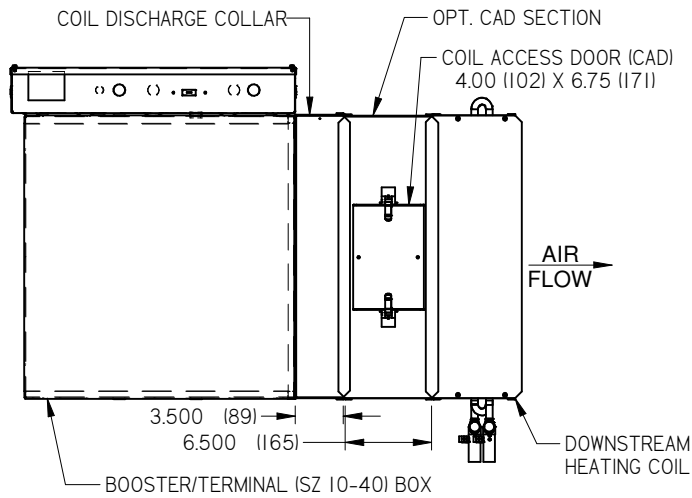

UNIT SIZE	COIL	L	H	ROWS
10 & 20	HEATING	6.000 (152)	7.750 (197)	<input type="checkbox"/> 1H <input type="checkbox"/> 2H
30 & 50	HEATING	6.000 (152)	10.000 (254)	<input type="checkbox"/> 1H <input type="checkbox"/> 2H
40	HEATING	6.000 (152)	12.500 (318)	<input type="checkbox"/> 1H <input type="checkbox"/> 2H

ACCESS DOOR OPTIONS:

- ☐ NO COIL ACCESS DOOR
- ☐ CAD - ACCESS DOOR W/ SCREWS
- ☐ CADL - ACCESS DOOR W/ SNAP LATCHES
- ☐ CADQ - ACCESS DOOR W/ QUARTER TURN SASH LATCHES

COIL HANDING OPTIONS:

- ☐ LH-HEAT
- ☐ RH-HEAT

NOTES:

- FABRICATED FROM 22 GA. GALVANIZED STEEL. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- COILS HAVE 1/2" COPPER TUBES AND ALUMINUM FINS WITH 7/8" O.D. SWEAT CONNECTIONS
- METHOD OF VENTING COIL IS TO BE PROVIDED BY INSTALLING CONTRACTOR
- COIL DISCHARGE COLLAR REQUIRED TO ATTACH COILS TO FANS

- HANDING OF COILS CAN BE ON THE SAME SIDE AS THE CONTROLS OR OPPOSITE SIDE. LEFT HAND UNIT AND RIGHT HAND CONNECTION IS ILLUSTRATED ABOVE.
- ALLOW 1-1/2" (38) MINIMUM CLEARANCE FOR INSTALLATION AT THIS END
- PERFORMANCE RATED AND CERTIFIED IN ACCORDANCE WITH THE CURRENT EDITION OF ARI STANDARD 410
- STANDARD COILS SUPPLIED WITH 12 FINS PER INCH.

Project Name and Number:

 Description: **FPB - FAN POWERED BOX - HOT WATER COILS**

Engineer:

 Submission
Date:

 PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 Global IFS. ANY REPRODUCTION IN PART
 OR AS A WHOLE WITHOUT THE WRITTEN
 PERMISSION OF Global IFS IS PROHIBITED

Dwg Release: 272830 Sheet: 1 Size: Letter

01/11/2024 REV A