


# TAG:

## **FPB OPTIONS - REHEAT COILS**

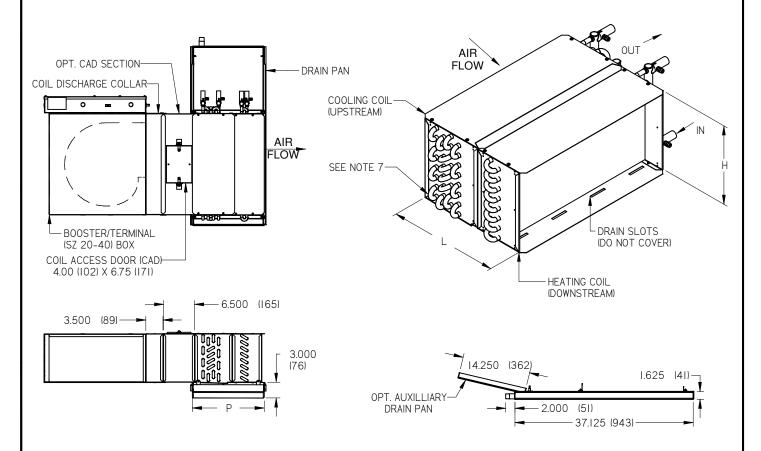

REHEAT CONFIG	EAT CONFIG SIZE 20			☐ SIZE 30			☐ SIZE 40		
(COOL -HEAT ROWS)	L	Н	P	L	Н	P	L	Н	P
☐ 1C-1H ROWS	12.000 (305)	7.750 (197)	13.250 (337)	12.000 (305)	10.000 (254)	13.250 (337)	12.000 (305)	12.500 (318)	13.250 (337)
☐ 2C-1H ROWS									
☐ 3C-1H ROWS	13.750 (349)		15.000 (381)	13.750 (349)		15.000 (381)	13.750 (349)		15.000 (381)
☐ 4C-1H ROWS									
☐ 6C-1H ROWS	15.500 (394)		16.625 (422)	15.500 (394)		16.625 (422)	15.500 (394)		16.625 (422)
☐ 1C-2H ROWS	12.000 (305)		13.250 (337)	12.000 (305)		13.250 (337)	12.000 (305)		13.250 (337)
☐ 2C-2H ROWS									
☐ 3C-2H ROWS	13.750 (349)		15 000 (201)	13.750 (349)		15.000 (381)	13.750 (349)		15.000 (381)
☐ 4C-2H ROWS			15.000 (381)						
☐ 6C-2H ROWS	15.500 (394)		16.625 (422)	15.500 (394)		16.625 (422)	15.500 (394)		16.625 (422)

### ACCESS DOOR OPTIONS:

□ NO COIL ACCESS DOOR

□ CAD - ACCESS DOOR W/ SCREWS

☐ CADL - ACCESS DOOR W/ SNAP LATCHES

 $\hfill\square$  CADQ - ACCESS DOOR W/ QUARTER TURN SASH LATCHES

### REHEAT COIL HANDING OPTIONS:

 $\square$  LH-COOL, LH-HEAT  $\square$  RH-COOL, RH-HEAT

DRAIN PAN OPTIONS:

□ STAINLESS STEEL

DRAIN PAN OVERFLOW:

☐ OVERFLOW SENSOR

☐ GALVANIZED W/ AUXILLIARY PAN

 $\square$  STAINLESS STEEL W/ AUXILLIARY PAN

### NOTES

- FABRICATED FROM 22 GA. GALVANIZED STEEL. MECHANICALLY SEALED, LEAK RESISTANT CONSTRUCTION.
- 2. COILS HAVE 1/2" COPPER TUBES AND ALUMINUM FINS WITH 7/8" O.D. SWEAT CONNECTIONS
- 3. METHOD OF VENTING COIL IS TO BE PROVIDED BY INSTALLING CONTRACTOR  $% \left( 1\right) =\left( 1\right) \left( 1\right$
- 4. COIL DISCHARGE COLLAR REQUIRED TO ATTACH COILS TO FANS
- 5. COILS COME WITH GALVANIZED DRAIN PAN EXTERNALLY INSULATED WITH FIBER FREE FOAM
- 6. HANDING OF COILS CAN BE ON THE SAME SIDE AS THE CONTROLS OR OPPOSITE SIDE. LEFT HAND UNIT AND RIGHT HAND CONNECTION IS ILLUSTRATED ABOVE.
- 7. ALLOW 1-1/2" (38) MINIMUM CLEARANCE FOR INSTALLATION AT THIS END
- 8. PERFORMANCE RATED AND CERTIFIED IN ACCORDANCE WITH THE CURRENT EDITION OF ARI STANDARD 410
- 9. STANDARD COILS SUPPLIED WITH 12 FINS PER INCH.

Floject Name and Number.					PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF			
Description: FPB - FAN POWERED BOX - REHEAT COILS					Global IFS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Global IFS IS PROHIBITED			
Engineer:		Submission Date:		Dwg Release: 272837	Sheet:	Size: Letter		