Magna-Lock Wood Plank On Steel Top Sheet Panel

Wood Plank Dimensions

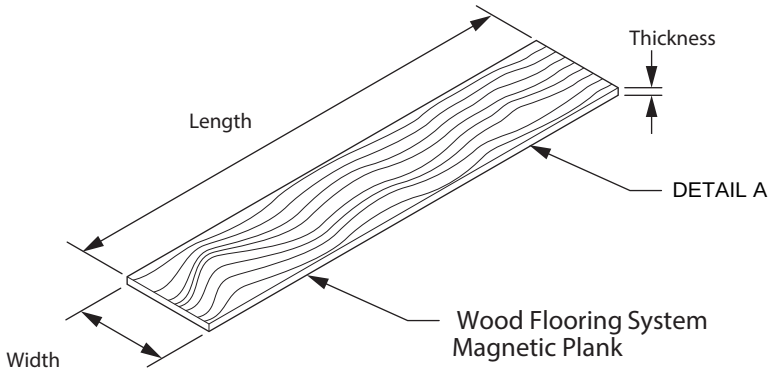

Section View - Wood Plank & Steel Topsheet TecCrete

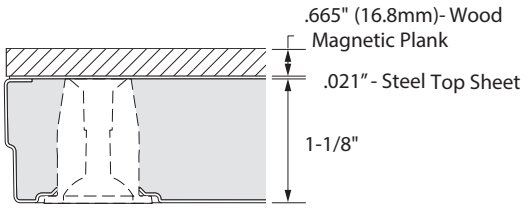

Wood Plank Mini-Tongue & Groove



A



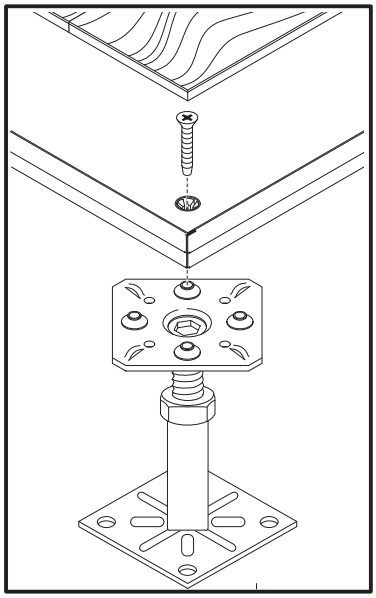

Typical Wood Magnetic Panel

Specifications:

Wood Magnetic Plank

- Various wood species including White Oak, Hickory, Maple and Other Options Wood
- thickness ranges between .625"" (15.8mm)
- Magnet layer thickness .04" (1mm)
- Mini-tongue protects against floor lifting and allows removal of 2 planks at once for non-progressive floor removal.

Steel Top Sheet Panel

- Lightweight High-Strength Concrete
- Galvanealed Steel Pan
- Galvanealed Steel Top Sheet
- Panel Size (Nominal): 24" x 24"

Features

- Finished Floor Height: 3" to 63" Standard Special heights available upon request.
- Overall Pedestal Adjustment: ±1" height (FFH>6").
- Steel top sheet panel should be protected during construction.
- A flat level raised floor is critical to a successful wood floor system installation.
- Steel top sheet panel to be used with the magnetic wood plank as a raised access floor system.
- Wood planks should be installed just before furniture move in when all heavy construction is complete.
- Temperature to be maintained at a constant level between 55 and 80 degrees F and Relative Humidity between 25% and 65%.
- Planks are engineered hardwood for durability and stability.
- All Lacey Act compliant and responsibly harvested from sustainable forests.

Brand	Length (in)	Width (in)	Thickness (in) (without magnet)	Protection Coating Type	Sustainability Sourced	Custom Options
Northern Wide Plank	Varying lengths up to 72"	6"	5/8"	Oil/Wax	Yes	Yes

Architect Signature _____ Date _____

Owner Signature _____ Date _____

G.C. Signature _____ Date _____

Global IFS

3700 32nd St. Kentwood, MI 49512

Manufacturer reserves the right to change specifications without notice